



MODULAR LED LINEAR | Suspension

VCLRS-LT60

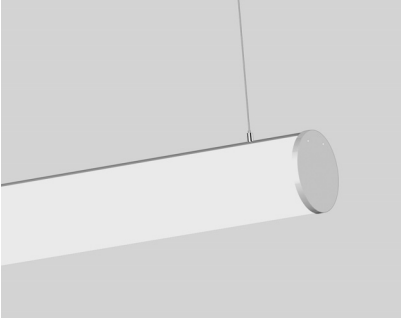


- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Specially designed light source with PC diffusers producing homogeneous and soft lighting

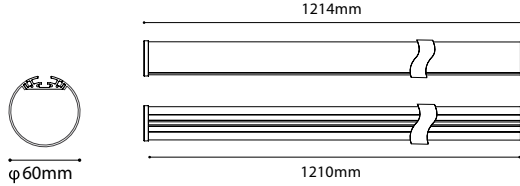

1.2m Luminaire Parameters

Model	LT60
Length	1214 x Ø60mm
Cover	Diffuser
Lumens	2400Lm
Typ.power	35W
CCT	3000K/4000K/6000K
CRI	>80
Input voltage	100-277VAC 50Hz/60Hz
Power factor	>0.95
Beam angle	140°
Power installation	External
Electric grade	Class II
Color	Silver/White/Black
Installation	Pendant

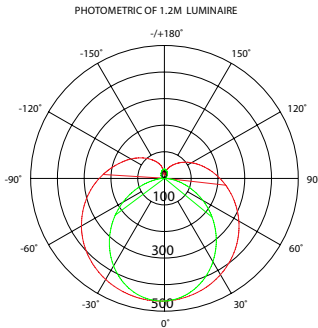

Height	Eavg,Emax	Angle:103.92deg	Diameter
1m	183.1,476.8lx		255.63cm
2m	45.78,119.2lx		511.27cm
3m	20.35,52.98lx		766.90cm
5m	7.324,19.07lx		1278.17cm
7m	3.737,9.731lx		1789.44cm



Ordering Code: VCLRS-LT60 - **LL** - **ZZZ** - **CC** - **AA**

Example: VCLRS-LT60-1200-830-BK-ND

LL = Cutting Length in mm: 500 / 600 / 900 etc..

CC = Fitting color: **WH** = White; **BK** = Black; **SV** = Silver

ZZZ = the code for color rendering and color temperature, eg. **827** = CRI >80 and CCT - 2700K; **830** = CRI >80 and CCT - 3000K; **840** = CRI >80 and CCT - 4000K

AA is the dimming requirements = **ND** for non dim, **DA** for DALI, **AN** for 0-10V, **TR** for Trailing edge dimming