



LUMINAIRE SPECIFICATION SHEET

Product No. : ILM-KLO 595x595 36W - CCT SELECTABLE LED BACKLIT PANEL

Mounting Type : LAY-IN, RECESSED, SUSPENSION

Square Lay-in/Recessed/Suspension backlit LED panel luminaire with frosted acrylic diffuser. LED color selectable for 3000K, 4000K or 6000K. Aluminium square white trim. For indoor use.

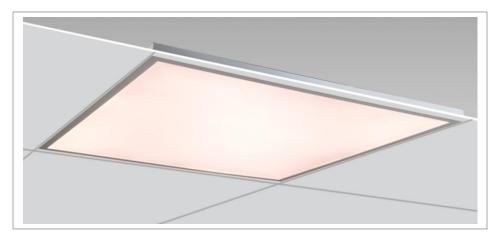



SPECIFICATIONS

Power (W) : 36W Lamp Source : LED Strip

Color Temperature : Color Selectable 3000K/4000K/6000K

Lumen output : 120 Lm/w

Color Rending (CRI) :>80

Fixture Dimension : 595 x 595 x H:30mm


Input Voltage : 220-240VAC, 50-60Hz, 900mA Material : Powder painted. Aluminum.

LED Driver option:

- Non-dim LED driver OR
- Dimming 0-10V

APPLICATIONS

For indoor use. In offices (receptions, boardrooms, restaurants etc.) Public buildings: cinema, theatres, swimming pools, exhibition halls) Hotel lobbies, Retail (high end shops, supermarkets, bakery/butcher areas, leather goods etc)





LUMINAIRE SPECIFICATION SHEET

Product No. : ILM-KLO 1195x595 50W - CCT SELECTABLE LED BACKLIT PANEL

Mounting Type : LAY-IN, RECESSED, SUSPENSION

Lay-in/Recessed/Suspension backlit LED panel luminaire with frosted acrylic diffuser. LED color selectable 3000K, 4000K or 6000K. Aluminium rectangle white trim. For indoor use.



SPECIFICATIONS

Power (W) : 50W

Lamp Source : LED Strip

Color Temperature : CCT 3000K/4000K/6000K

Lumen output : 120 Lm/w

Color Rending (CRI) :>80

Fixture Dimension : 1195 x 595 x H:30mm

Input Voltage : 220-240VAC, 50-60Hz, 1200mA (27V-42V)

Material : Powder painted. Aluminum.

LED Driver option:

- Non-dim LED driver OR
- Dimming 0-10V

APPLICATIONS

For indoor use. In offices (receptions, boardrooms, restaurants etc.) Public buildings: cinema, theatres, swimming pools, exhibition halls) Hotel lobbies, Retail (high end shops, supermarkets, bakery/butcher areas, leather goods etc)